

# SELF - UNLOADING GRAIN CART

MODEL CRV15 - CAPACITY 18.750Lts

**OMBU**  
Máquinas agrícolas & Remolques




GESTION  
DE LA CALIDAD

ISO 9001:2000 / ISO 14001:2004



Tubular chassis structure made in Micro Alloyed Steel.

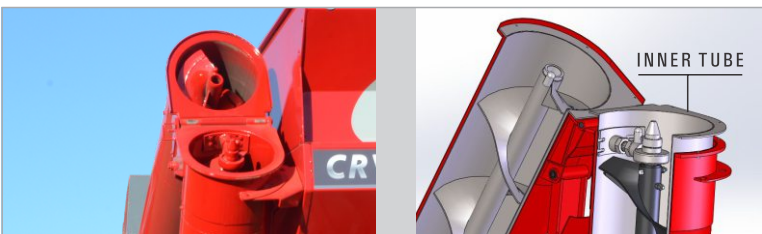

**DOUBLE INNER UNLOADING TUBE**

LESS WEAR. MORE USEFUL LIFE.

The upper and lower unloading tubes of the CRV grain cart are sheathed by an inner tube, ensuring the long lasting, bringing extra useful life and reducing the costs when replacing is needed.

Unloading tube of Ø 510mm with more inclination to reduce unloading times avoiding grain damage by decreasing the return of them.

**Other features**

The system of 90° folding bottom plates is easily operated from the side of the unit. It permits an agile cleaning or dump the load on the floor if needed.

Open/close guillotine valve mechanical indicator for a more controlled unloading.

Unloading tube support with a magnet set to avoid vibrations during transport.

The unit has two viewers for a better loading control distribution.


Rear LED personalized design lights that also mark the maximum width of the unit following transit normative.

Rear bumper with reinforced hitch included.

Front quick discharge gate with nozzle for filling bags.

Pastic tool box with lock.

10Lts water tank with soup dispenser included.

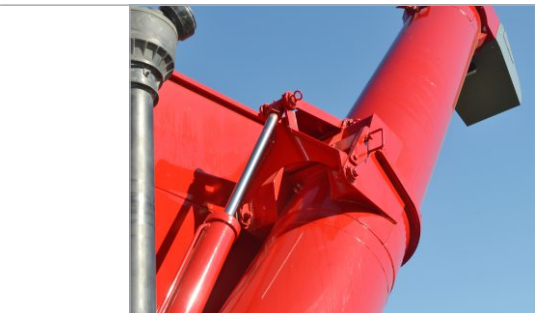

For the unloading tube opening has a 3 " diameter cylinder and the coupling system of the upper/lower tubes prevent the loss of grains.



The transmission of the CRV grain cart is made by a double ASA 80 – 2H chain with a self- adjustable chain tensor. The gearbox has self – lube bearings and is located underneath the unloading tube and bringing direct transmission to the augers. This transmission is protected by a high impact fiberglass cover.



Robust with detachable axle spindles. The axle can be moved from its standard position to vary the loading distribution. This procedure doesn't affect the functioning of the scale in case it was placed. Electronic scales are optional.



The roll over tarp system of the CRV grain cart has a lower profile towards the combine's unloading tube. Easy operation